
10K GLOBE VALVE

Pressure-Temperature Rating: 1.0 MPa: 180°C

UJB

UJBM

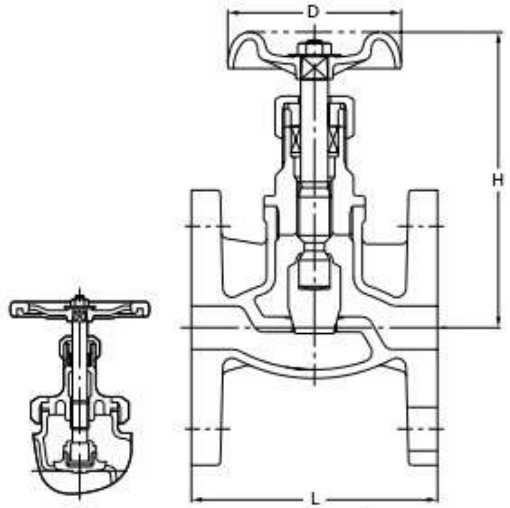

65 and larger　　50 and smaller



Face to face dimensions: JIS B2011
End flange dimensions: JIS B2220*
Wall thickness: KITZ Std.

*Except flange thickness

Parts	UJB	UJBM
Body	SCS13A	SCS14A
Bonnet	SCS13A	SCS14A
Stem	304SS	316SS
Disc	304SS	316SS
Gland	304SS	316SS
Gland packing	Refer to Page 10	
Packing nut	304SS	
Handwheel	Zinc Diecast (10 to 20) / Aluminum Diecast (25 to 50) / Ductile iron (65 & 80)	
Bonnet ring*	Stainless steel	
Gasket*	Asbestos-free	
Packing washer	316SS (10 to 50)	
Name plate	Aluminum	

*For size 21/2 and larger

Unit: mm

Nominal Size	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
	10	15	20	25	32	40	50	65	80
L	85	85	95	110	130	150	180	210	240
H	109	111	112	142	150	171	189	253	280
D	60	60	70	90	90	100	115	180	225