

## 10K DUCTILE IRON GATE VALVE SCREWED ENDS

**KITZ Fig: 10SMS**

Sizes: -inch(-mm)

Standards

- . End to End: JIS B2051
- . End Connection: JIS B0203
- . Wall Thickness: JIS B2051

Test Standard

- . KITZ STANDARD

Dimensions


SIZE (inch/mm)	L	L1	H	D1	Kg



Specifications

10K DUCTILE IRON GATE VALVE SCREWED ENDS

End to End : JIS B2051, End Connection : JIS B0203, Wall Thickness : JIS B2051, Test Standard : KITZ STANDARD, Sizes : -inch(-mm), , KITZ Fig : 10SMS

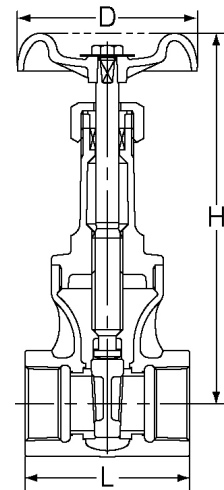

For more details, please refer to the drawing.

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.