

10K CAST STAINLESS STEEL BALL VALVE FLANGED ENDS

KITZ Fig: 10UTDZ

Sizes: 2 1/2-inch(65-mm)

静電防止機構付, フルボア型, ISO5211対応

Standards

- End to End: ASME B16.10 CLASS 150
- End Connection: JIS B2220 10K
- Wall Thickness: ASME B16.34 CLASS 150

Test Standard

- KITZ STANDARD

Approvals

(一社) 日本バルブ工業会規格適合品 65-200 mm (2 1/2-8 inch)
approved

Dimensions

SIZE (inch/mm)	L	L1	H	D1	Kg
2 1/2 65	190.0		179.0	400.0	
3 80	203.0		188.0	400.0	
4 100	229.0		224.0	460.0	
5 125	356.0		240.0	460.0	
6 150	394.0		314.0	1000.0	
8 200	457.0		406.0	1500.0	

Specifications


10K CAST STAINLESS STEEL BALL VALVE FLANGED ENDS, 静電防止機構付, フルボア型, ISO5211対応

End to End : ASME B16.10 CLASS 150, End Connection : JIS B2220


10K, Wall Thickness : ASME B16.34 CLASS 150, Test Standard : KITZ STANDARD, Sizes : 2 1/2-inch(65-mm), Approvals : (一社) 日本バルブ工業会規格適合品 65-200 mm (2 1/2-8 inch), KITZ Fig : 10UTDZ



JV

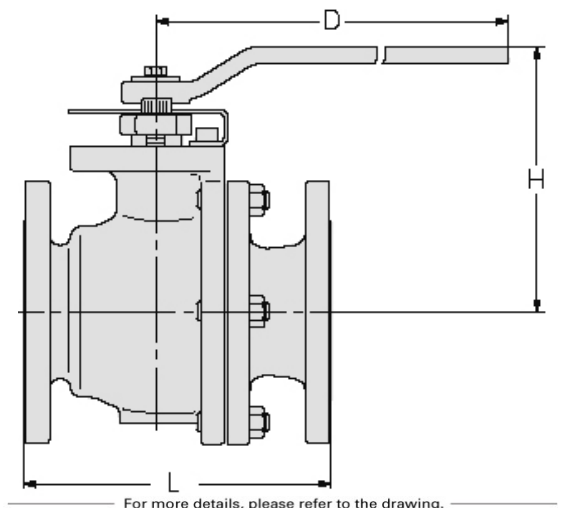

For more details, please refer to the drawing.

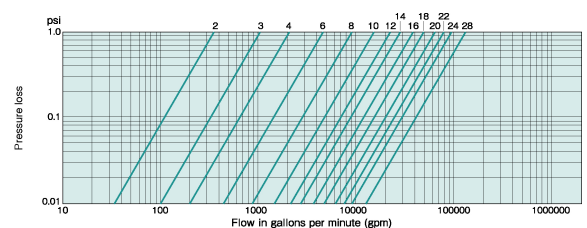

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

KITZ

KITZ CORPORATION 1-10-1 Nakase, Mihama-ku, Chiba 261-8577, Japan
© KITZ Corporation. All Right Reserved.

ISO 9001
CERTIFIED
Since 1989