

5/10KALUMINUM BUTTERFLY VALVES,CENTER DRIVE DISC

KITZ Fig: 10XJME

Sizes: 21/2-inch(65-mm)

LEVER OPERATED.

Standards

- End to End: JIS B2032 46 SERIES (2)
- End Connection: WAFER TYPE (JIS 5/10K)
- Wall Thickness: KITZ STANDARD

Test Standard

- JIS B2032

Dimensions


SIZE(inch/mm)	L	L1	H	D1	Kg
21/2 65	46.0		185.0	180.0	
3 80	46.0		193.0	180.0	
4 100	52.0		204.0	180.0	
5 125	56.0		249.0	230.0	
6 150	56.0		261.0	230.0	

Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	ALUMINUM DIE-CAST	ADC12
STEM	STAINLESS STEEL	SUS410
SEAT RUBBER	EPDM	

Specifications

5/10KALUMINUM BUTTERFLY VALVES,CENTER DRIVE DISC, LEVER OPERATED.
 End to End : JIS B2032 46 SERIES (2),End Connection : WAFER TYPE
 (JIS 5/10K),Wall Thickness : KITZ STANDARD,Test Standard : JIS
 B2032,Sizes : 21/2-inch(65-mm),BODYMATERIAL :ALUMINUM DIE-
 CAST,STEMMATERIAL :STAINLESS STEEL,SEAT RUBBERMATERIAL :EPDM,KITZ
 Fig : 10XJME

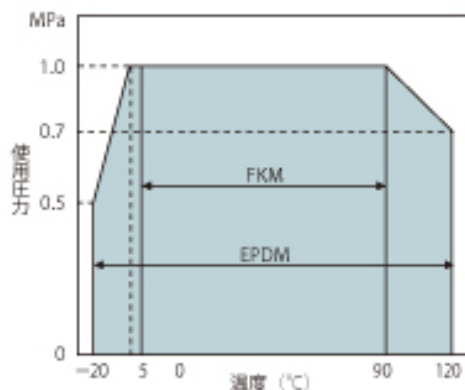

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

KITZ

KITZ CORPORATION 1-10-1 Nakase, Mihama-ku, Chiba 261-8577, Japan
 © KITZ Corporation. All Right Reserved.

ISO 9001
 CERTIFIED
 Since 1989