

CLASS 125 CAST IRON GATE VALVE FLANGED ENDS

KITZ Fig: 125FCL

Sizes: 2 1/2-inch(65-mm)

Standards


- End to End: ASME B16.10 CLASS 125
- End Connection: ASME B16.1 CLASS 125
- Wall Thickness: KITZ STANDARD

Test Standard

- KITZ STANDARD

Dimensions

SIZE (inch/mm)	L	L1	H	D1	Kg
2 1/2 65	190.0		383.0	170.0	
2 1/2 65	190.0		383.0	170.0	
3 80	203.0		437.0	170.0	
3 80	203.0		437.0	170.0	
4 100	229.0		534.0	225.0	
4 100	229.0		534.0	225.0	
5 125	254.0		629.0	225.0	
5 125	254.0		629.0	225.0	
6 150	267.0		727.0	250.0	
6 150	267.0		727.0	250.0	
8 200	292.0		920.0	280.0	
8 200	292.0		920.0	280.0	
10 250	330.0		1135.0	350.0	
10 250	330.0		1135.0	350.0	
12 300	356.0		1364.0	450.0	
12 300	356.0		1364.0	450.0	
14 350	381.0		1561.0	500.0	

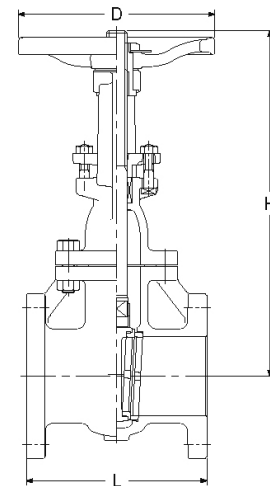

For more details, please refer to the drawing.

Specifications

CLASS 125 CAST IRON GATE VALVE FLANGED ENDS

End to End : ASME B16.10 CLASS 125, End Connection : ASME B16.1 CLASS 125, Wall Thickness : KITZ STANDARD, Test Standard : KITZ STANDARD, Sizes : 2 1/2-inch(65-mm),, KITZ Fig : 125FCL

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

KITZ

KITZ CORPORATION 1-10-1 Nakase, Mihama-ku, Chiba 261-8577, Japan
© KITZ Corporation. All Right Reserved.

ISO 9001
CERTIFIED
Since 1989