

## 20K DUCTILE IRON Y TYPE STRAINER FLANGED ENDS

KITZ Fig: 20FDYB

Sizes: 21/2-inch(65-mm)

40 メッシュ スクリーン

Standards

・ End to End: KITZ STANDARD

・ End Connection: JIS B2239 20K

・ Wall Thickness: KITZ STANDARD

Test Standard

・ KITZ STANDARD

Approvals

公共建築工事標準仕様書適合品（機械設備工事編） 65-300 mm (21/2-12 inch)

approved


Dimensions

SIZE(inch/mm)	L	L1	H	D1	Kg
21/2 65	305.0		221.0		
3 80	360.0		252.0		
4 100	415.0		292.0		
5 125	465.0		333.0		
6 150	515.0		380.0		
8 200	620.0		441.0		
10 250	760.0		548.0		
12 300	870.0		655.0		

Specifications

20K DUCTILE IRON Y TYPE STRAINER FLANGED ENDS, 40 メッシュ スクリーン

End to End : KITZ STANDARD, End Connection : JIS B2239 20K, Wall Thickness : KITZ STANDARD, Test Standard : KITZ STANDARD, Sizes : 21/2-inch(65-mm), Approvals : 公共建築工事標準仕様書適合品（機械設備工事編） 65-300 mm (21/2-12 inch), , KITZ Fig : 20FDYB

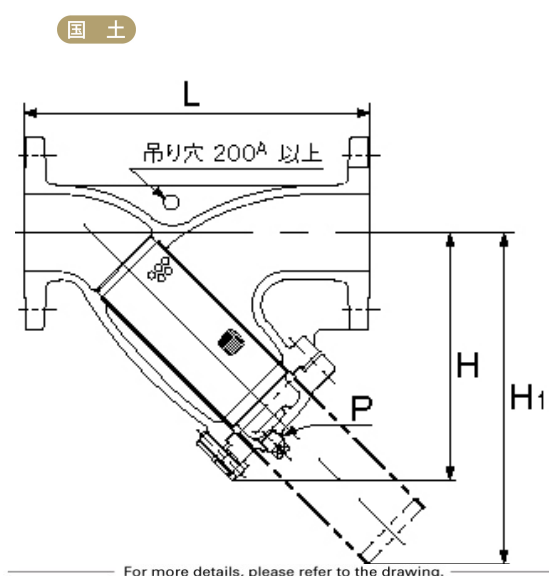

For more details, please refer to the drawing.

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

**KITZ**

KITZ CORPORATION 1-10-1 Nakase, Mihama-ku, Chiba 261-8577, Japan  
© KITZ Corporation. All Right Reserved.

**ISO 9001**  
**CERTIFIED**  
Since 1989