

## 20K DUCTILE IRON, LIFT CHECK VALVE

KITZ Fig: 20SN

Sizes: -inch(-mm)

UNION BONNET, SCREWED ENDS.

Standards

. End to End: KITZ STANDARD

. End Connection: JIS B0203

. Wall Thickness: KITZ STANDARD

Test Standard

. KITZ STANDARD

Dimensions

SIZE (inch/mm)	L	L1	H	D1	Kg

Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	DUCTILE IRON	FCD-S
BONNET	STAINLESS STEEL	SCS1
DISC	STAINLESS STEEL+HF	A351 Gr. CF8/SCS13A+HF (2)

Specifications


20K DUCTILE IRON, LIFT CHECK VALVE, UNION BONNET, SCREWED ENDS.

End to End : KITZ STANDARD, End Connection : JIS B0203, Wall

Thickness : KITZ STANDARD, Test Standard : KITZ STANDARD, Sizes : -

inch(-mm), BODY MATERIAL : DUCTILE IRON, BONNET MATERIAL : STAINLESS

STEEL, DISC MATERIAL : STAINLESS STEEL+HF, KITZ Fig : 20SN

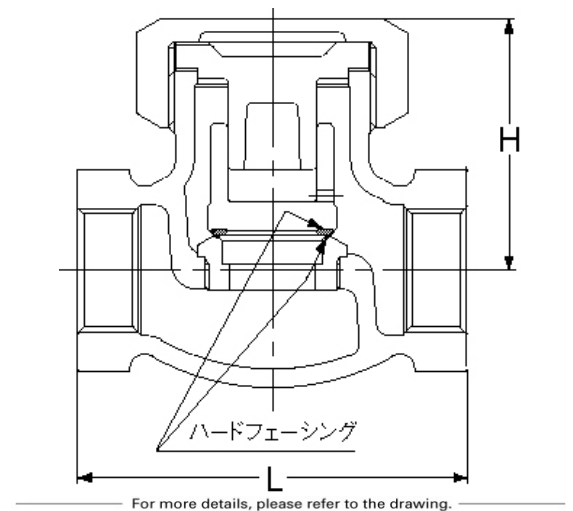

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

# KITZ

KITZ CORPORATION 1-10-1 Nakase, Mihama-ku, Chiba 261-8577, Japan  
© KITZ Corporation. All Right Reserved.

ISO 9001  
CERTIFIED  
Since 1989