

150psi DUCTILE IRON, BUTTERFLY VALVES

KITZ Fig: G-150DJ

Sizes: 14-24inch(350-600mm)

GEAR OPERATED.

Standards

- End to End: MSS SP67
- End Connection: WAFER TYPE (ASME B16.5 CL.150)
- Wall Thickness: KITZ STANDARD

Test Standard

- KITZ STANDARD

Dimensions

SIZE (inch/mm)	L	L1	H	D1	Kg
14 350	77.7	220.0	447.0	310.0	
16 400	101.6	220.0	502.0	310.0	
18 450	114.3	220.0	526.0	310.0	
20 500	127.0	360.0	587.0	500.0	
24 600	153.9	360.0	635.0	500.0	


Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	DUCTILE IRON	A536
STEM	STAINLESS STEEL	A276 TYPE410
SEAT RUBBER		NBR

Specifications

150psi DUCTILE IRON, BUTTERFLY VALVES, GEAR OPERATED.

End to End : MSS SP67, End Connection : WAFER TYPE (ASME B16.5 CL.150), Wall Thickness : KITZ STANDARD, Test Standard : KITZ STANDARD, Sizes : 14-24inch(350-600mm), BODY MATERIAL : DUCTILE IRON, STEM MATERIAL : STAINLESS STEEL, SEAT RUBBER MATERIAL : , KITZ Fig : G-150DJ

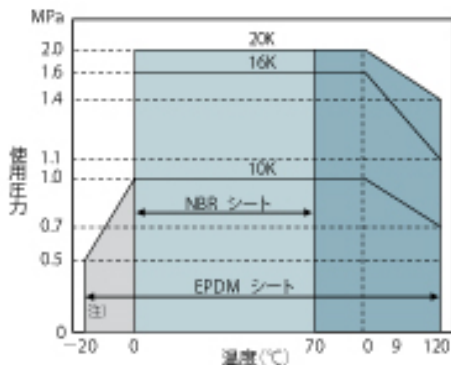

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

KITZ

KITZ CORPORATION 1-10-1 Nakase, Mihama-ku, Chiba 261-8577, Japan
© KITZ Corporation. All Right Reserved.

ISO 9001
CERTIFIED
Since 1989