

## 10K CAST STAINLESS STEEL, SWING CHECK VALVES

KITZ Fig: UOBM

Sizes: 21/2-inch(65-mm)  
SCREWED CAP, FLANGED ENDS.

Standards

- End to End: JIS B2002
- End Connection: JIS B2220 10K
- Wall Thickness: KITZ STANDARD

Test Standard

- KITZ STANDARD

Approvals

(一社) 日本バルブ工業会規格適合品 65-80 mm (21/2-3 inch)

Conform to

RoHS指令相当品 65-80 mm (21/2-3 inch)

approved

Dimensions

SIZE(inch/mm)	L	L1	H	D1	Kg
21/2 65	210.0		93.0		
3 80	240.0		104.0		

Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	STAINLESS STEEL	A351 Gr. CF8M/SCS14A
CAP	STAINLESS STEEL	316SS
DISC	STAINLESS STEEL	A351 Gr. CF8M/SCS14A


Specifications

10K CAST STAINLESS STEEL, SWING CHECK VALVES, SCREWED CAP, FLANGED ENDS.

End to End : JIS B2002, End Connection : JIS B2220 10K, Wall Thickness : KITZ STANDARD, Test Standard : KITZ STANDARD, Sizes : 21/2-inch(65-mm), Approvals : (一社) 日本バルブ工業会規格適合品 65-80 mm (21/2-3 inch), Conform to : RoHS指令相当品 65-80 mm (21/2-3 inch), BODY MATERIAL : STAINLESS STEEL, CAP MATERIAL : STAINLESS STEEL, DISC MATERIAL : STAINLESS STEEL, KITZ Fig : UOBM



JV  RoHS

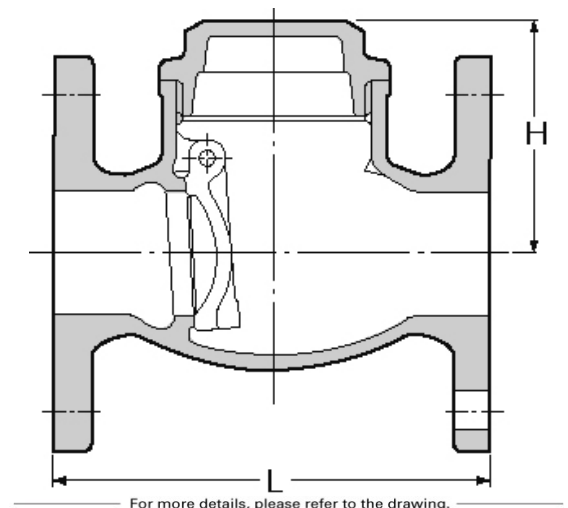

For more details, please refer to the drawing.

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

**KITZ**

KITZ CORPORATION 1-10-1 Nakase, Mihama-ku, Chiba 261-8577, Japan  
© KITZ Corporation. All Right Reserved.

ISO 9001  
CERTIFIED  
Since 1989

●Bシリーズ

単位MPa

流体の状態 呼び圧力	温度	W	G <sub>1</sub>	G <sub>2</sub>
		120℃以下	150℃以下	180℃
5K		0.7	0.5	—
10K		1.4	1.1	1.0
20K		2.0	1.2	1.0

【備考】 W: 圧力変動の少ない静流水のみ。

G<sub>1</sub>~G<sub>2</sub>: 蒸気、空気、不燃性ガス、油 (潤滑油→作動油) など。

注) BシリーズPTFEジスクリューグローブバルブを120℃以上で使用する場合は、当社までお問合せください。

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

**KITZ**

KITZ CORPORATION 1-10-1 Nakase, Mihama-ku, Chiba 261-8577, Japan  
© KITZ Corporation. All Right Reserved.

**ISO 9001**  
**CERTIFIED**  
Since 1989