

TYPE 800 CAST STAINLESS STEEL, BALL VALVES

KITZ Fig: UTHM

Sizes: -inch(-mm)

REDUCED BORE, SCREWED ENDS.

Standards

- . End to End: KITZ STANDRAD
 - . End Connection: JIS B0203
 - . Wall Thickness: KITZ STANDRAD
- Test Standard
- . KITZ STANDARD



Dimensions

SIZE (inch/mm)	L	L1	H	D1	Kg


Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	STAINLESS STEEL	A351 Gr. CF8M/SCS14A
BODY CAP	STAINLESS STEEL	A351 Gr. CF8M/SCS14A
STEM	STAINLESS STEEL	316SS
BALL	STAINLESS STEEL	316SS



Specifications

TYPE 800 CAST STAINLESS STEEL, BALL VALVES, REDUCED BORE, SCREWED ENDS.

End to End : KITZ STANDRAD, End Connection : JIS B0203, Wall Thickness : KITZ STANDRAD, Test Standard : KITZ STANDARD, Sizes : - inch(-mm), BODY MATERIAL : STAINLESS STEEL, BODY CAP MATERIAL : STAINLESS STEEL, STEM MATERIAL : STAINLESS STEEL, BALL MATERIAL : STAINLESS STEEL, KITZ Fig : UTHM

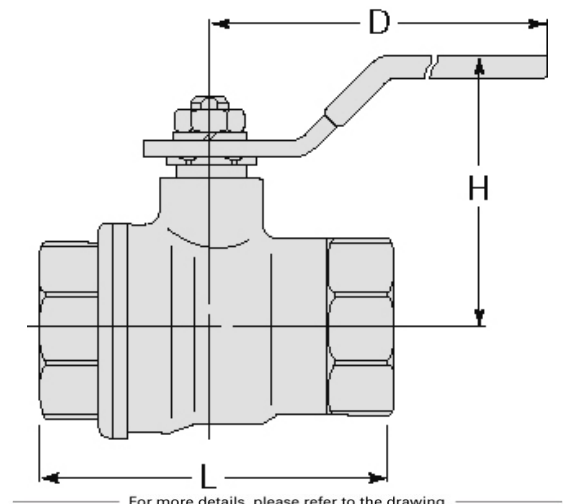

For more details, please refer to the drawing.

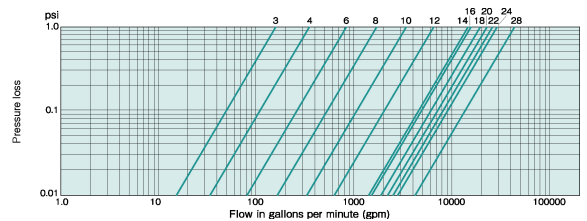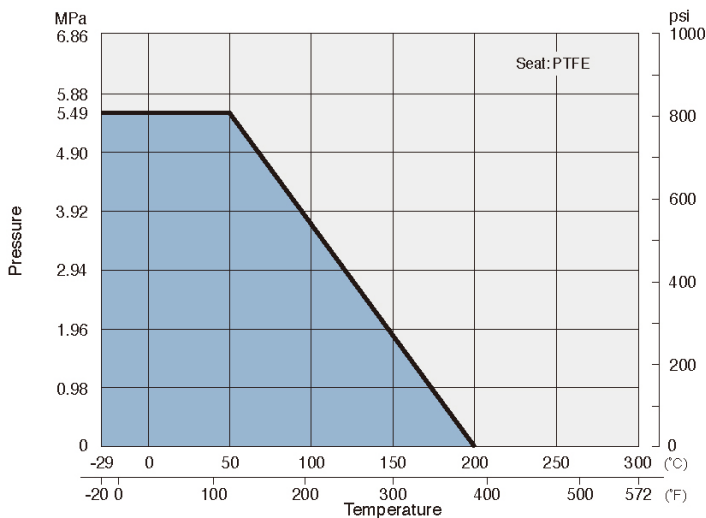

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

