# CLASS 300 CAST STAINLESS STEEL GATE VALVE FLANGED ENDS

## KITZ Fig: 300UMAM

Sizes: 21/2-inch(65-mm)

Standards

. End to End: ASME B16.10 CLASS 300

. End Connection: ASME B16.5 CLASS 300

. Wall Thickness: ASME B16.34 CLASS 300

Test Standard

. API 598

Dimensions

| SIZE(inch/mm) | | L | L1 | H | D1 | Kg |
|---|---|---|---|---|---|---|
| 21/2 | 65 | 241.0 | | 404.0 | 180.0 | |
| 3 | 80 | 283.0 | | 472.0 | 225.0 | |
| 4 | 100 | 305.0 | | 560.0 | 250.0 | |
| 5 | 125 | 381.0 | | 625.0 | 300.0 | |
| 6 | 150 | 403.0 | | 753.0 | 350.0 | |
| 8 | 200 | 419.0 | | 968.0 | 400.0 | |
| 10 | 250 | 457.0 | | 1177.0 | 450.0 | |
| 12 | 300 | 502.0 | | 1378.0 | 500.0 | |
| 14 | 350 | 762.0 | | 1588.0 | 600.0 | |
| 16 | 400 | 838.0 | | 1744.0 | 600.0 | |
| 18 | 450 | 914.0 | | 1923.0 | 680.0 | |
| 20 | 500 | 991.0 | | 2131.0 | 760.0 | |
| 24 | 600 | | | | | |

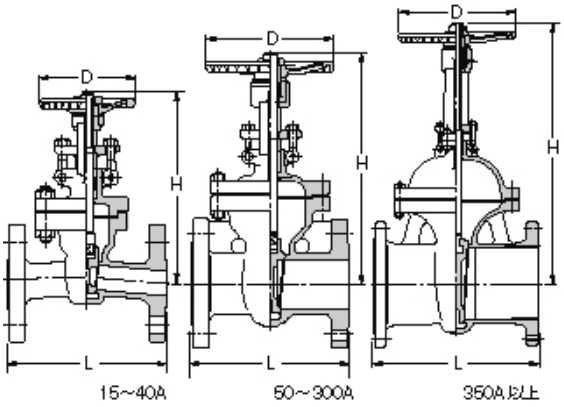


For more details, please refer to the drawing.

Specifications

CLASS 300 CAST STAINLESS STEEL GATE VALVE FLANGED ENDS
End to End : ASME B16.10 CLASS 300,End Connection : ASME B16.5 CLASS 300,Wall Tchickness : ASME B16.34 CLASS 300,Test Standard : API 598,Sizes : 21/2-inch(65-mm),,KITZ Fig : 300UMAM

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.


© KITZ Corporation. All Right Reserved.